


Slit 3C Color Coded Cable

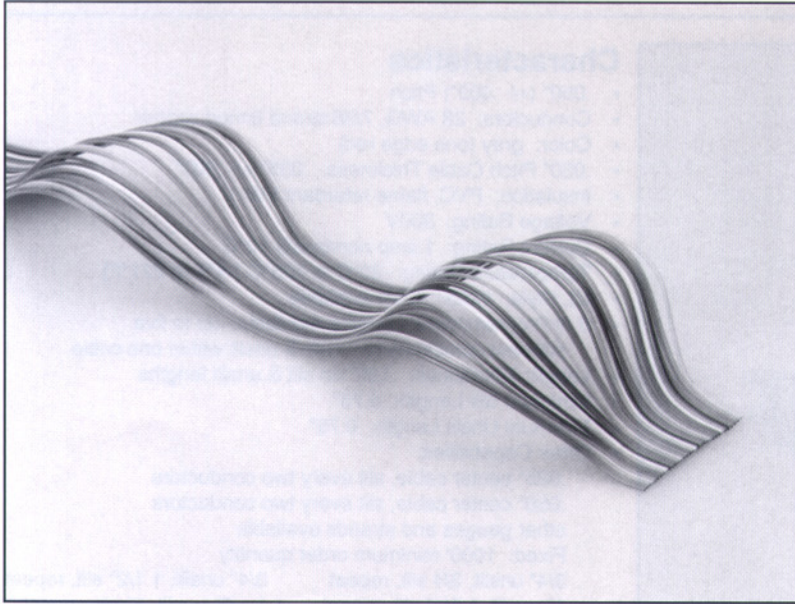

Characteristics

- .050" (+/- .005") Pitch
- Conductors: 28 AWG, 7/36 stranded tinned copper
- Color: brown, red, orange, yellow, green, blue, violet, gray, white, black (repeat)
- Cable Thickness: .042" +/- .003
- Insulation: PVC, flame retardant VW-1
- Laminate: clear PVC, self-extinguishing
- Voltage Rating: 300V
- Current Rating: 1 amp nominal @ 10°C (221°F) available
- UL Style: #2697, CSA available, 105°C UL style available
- # of Programmable Lengths Available: up to five different combinations of slit & unslit within one cable
- Length Tolerances: Slit dimensions have a tolerance of +/- 0.125" in programmed (multiple) lengths
- PROGRAMMABLE: 2500' minimum order quantity (you define unslit, slit dimensions)

Ordering Information:

Overall put-up length: _____ Measure in: feet meters

Slit: Every conductor AWG: _____ # of conductors: _____
 Every two conductors Strand: _____ (72 maximum)
 Spacing: _____

Slit length measure in: inches mm

Indicate each unslit and slit length in spaces below.
 Write in "repeat", if appropriate.

Unslit	Slit	Unslit	Slit	Unslit	Slit
--------	------	--------	------	--------	------

Factory Part Number (will be assigned)

Date _____

This request for pricing is made by:

Name _____

Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone No. (____) _____

Fax No. (____) _____

Comments: _____

Copy & Fax to: Cable Marketing Manager

Amphenol
SPECTRA-STRIP

Fax: (203) 281-5872
 Phone: (203) 281-3200
 (800) 846-6400